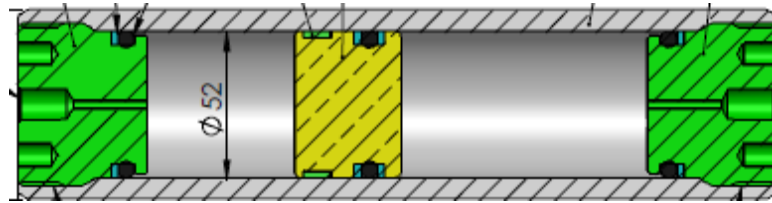


300 cc Lightweight Piston cylinder - 12000 Psi – 17/4-PH

Description:

Lightweight piston cylinder.

Suitable for use in any ambient condition to be expected outdoor, subject to the specified temp, limitations, including offshore platforms, onshore terminals and sites in tropical areas.

End caps supplied with 1/8" Female NPT ports. Valves with 1/8" NPT female ports.

Specifications:

Model: 12000 Psi Sample Cylinder
 Capacity: 300 cc
 Max Pressure: 12000 psi / 827 bar
 Working temperature: -20 to 200 °C
 Material: 17/4-PH Stainless Steel. Valves in 316 SS
 Net weight (kg): 5,5 kg.
 Dimensions (mm): Length 272 x Ø 68.5. Length with one valve in each end 350 and hight is 120.

Optional:

- Transportation box available.

Service:	Compressed Gas, Flammable N.O.S	UN 1954
	Hydrocarbon Gas Mixture	UN 1964
	Hydrocarbon Gas Mixture Liquefied , N.O.S	UN 1964
	H2S – Hydrocarbon Sulphide	UN 1053
	Liquefied gas, Flammable N.O.S	UN 3161
	Natural Gas with Metane content	UN 1971
	Nitrogen Compressed	UN 1066
	Crude Petroleum	UN 1267
	Petroleum Gas, Liquefied or Liquefied Petroleum Gas	UN 1075
	Compressed gas, toxic, flammable, N.O.S inhalation Hazard Zone B	UN 1953
	Formation Water, Water with dissolved salts and various quantities and compositions.	

DOCUMENTATION

Standard: Certificate of conformity.
 Pressure test Certificate